

Width of packing 17" (43 cm)

4.7" (12 cm)

Verse 7" (23 cm)

Gusset 2" (5 cm)

Gusset 2" (5 cm)

Front 13" (33 cm)

Gusset 2" (5 cm)

Gusset 2" (5 cm)

5.9" (15 cm)

Valve

140



**EQUALIZE™ GT**

Pelletized Hi-Mag Limestone

**GUARANTEED ANALYSIS**

Calcium (Ca).....	20.0%
Magnesium (Mg).....	12.0%
Calcium Carbonate (CaCO <sub>3</sub> ).....	50.0%
Calcium Carbonate Equivalent (CCE).....	97.0%
Calcium Oxide (CaO).....	28.0%
Magnesium Carbonate (MgCO <sub>3</sub> ).....	41.7%
Magnesium Oxide (MgO).....	19.9%
Moisture Content Does Not Exceed.....	1.0%

Derived from Dolomite.

ALSO CONTAINS NON-PLANT FOOD INGREDIENT:  
2% lignosulfonates as Water Soluble Binder

Pennsylvania, Ohio: ENP= 1800 lbs; Missouri: ENM = 630 pound/ton; Iowa: Iowa Secretary of Agriculture Certified 1500 lbs; ECCE per ton; Florida: F1564. This material requires 1858 lbs. to be equal to one ton of standard liming material. Kansas, Nebraska, Oklahoma: ECCE = 70%; Minnesota: ENP = 82%; North Carolina: 1896 lbs. of this material equals one ton of standard agricultural liming material ENV = 76%; Tennessee: RNV = 88%; New York: Effective Neutralizing Value = 76%; 11 tons of material needs to be equal to one ton of material having 100% Effective Neutralizing Value; Wisconsin: Neutralizing Index Zone = 80-85; Oregon: Lime Score = 95; Virginia: Effective Neutralizing Value = 76%

**FINENESS OF GRIND**

Prior to pelletizing or tested by wet sieve method

Minimum Passing	Sieve*
100%.....	8 & 20 mesh
98%.....	40 mesh
94%.....	50 mesh
85%.....	60 mesh
70%.....	100 mesh

\* (U.S. Standard Sieves)

**IMPORTANT: READ BEFORE USE:**

Read the entire Directions for Use and the Warranty Disclaimer and Limitation of Liability before using this product. If terms are not acceptable, return the unopened product container at once. By using this product, user or Buyer accepts the following Warranty Disclaimer and Limitation of Liability.

**DIRECTIONS FOR USE:**

DO NOT APPLY NEAR WATER, STORM DRAINS, OR DRAINAGE DITCHES. DO NOT APPLY IF HEAVY RAIN IS EXPECTED. APPLY THIS PRODUCT ONLY TO YOUR LAWN/GARDEN, AND SWEEP ANY PRODUCT THAT LANCES ON THE DRIVEWAY, SIDEWALK, OR STREET BACK ONTO YOUR LAWN/GARDEN.

**WARRANTY DISCLAIMER and LIMITATION OF LIABILITY:**

Manufacturer warrants that this product conforms to the chemical description on the label and is reasonably fit for the purposes stated on the label when used in strict accordance with the directions. Manufacturer makes NO OTHER EXPRESS OR IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Where permissible, it is Manufacturer's intent to LIMIT ANY LIABILITY FOR SPECIAL, CONSEQUENTIAL OR INCIDENTAL ECONOMIC DAMAGES to refund of purchase price or replacement of product, at Buyer's choice. Manufacturer DISCLAIMS ANY LIABILITY FOR COMPENSATORY OR OTHER DAMAGES ARISING OUT OF ANY USE CONTRARY TO LABEL DIRECTIONS. Use contrary to label directions is not permitted.

**LEGAL RIGHTS:**

THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY HAVE OTHER RIGHTS THAT VARY FROM STATE/JURISDICTION TO STATE/JURISDICTION.

**WARNING**  
MAY BE HARMFUL IF SWALLOWED  
MAY CAUSE MILD SKIN IRRITATION  
MAY CAUSE EYE IRRITATION  
MAY CAUSE RESPIRATORY IRRITATION

**PRECAUTIONARY STATEMENTS:**

- Call a poison center/physician if unwell
- If skin irritation occurs, seek medical advice
- If in eyes, rinse cautiously with water for several minutes; remove contact lenses
- If eye irritation persists, seek medical advice
- Wash hands after handling
- Use only outdoors or in well-ventilated areas
- Avoid breathing dust
- If inhaled, remove to fresh air and keep at rest in a position comfortable for breathing
- Store container tightly closed
- Dispose of contents/container in accordance with national/regional/local regulations

- FIRST AID MEASURES:**
- If inhaled: Move victim to fresh air. Seek medical attention if irritation persists.
  - If on skin: Wash affected areas with soap and water. Seek medical attention if irritation persists. Wash contaminated clothing before reuse.
  - If in the eyes: Immediately flush with water for at least 20 minutes. Seek medical attention if irritation persists.
  - If swallowed: If victim is alert and not convulsing, give one glass of water to dilute material but DO NOT induce vomiting. Seek immediate medical attention.

**PPE:** Handlers and applicators should wear NIOSH-approved particulate or mist respirator if required. Safety glasses with side shields, goggles, or a face shield, long-sleeved shirts, rubber gloves, and local exhaust ventilation are recommended.

Mineral Processing Companies  
1855 CH 99 | Carey, OH 43316  
800-757-4951 (emergency)  
419-491-2927 (information)

FREIGHT SHIPPING BAG  
Meeting Requirements of  
APPLICABLE FREIGHT CLASSIFICATION  
Guaranteed by  
Inplac North American, Inc.  
Charlotte, NC/USA



Product Code: 12788P  
Bag Code: 12785

© The Andersons, 2011  
The Andersons logo is a registered trademark of The Andersons, Inc.  
Equalize is a trademark of The Andersons, Inc.

Inplac S.A.  
305899


Pelletized Hi-Mag Limestone

**EQUALIZE™ GT**



**EQUALIZE™ GT**

Pelletized Hi-Mag Limestone

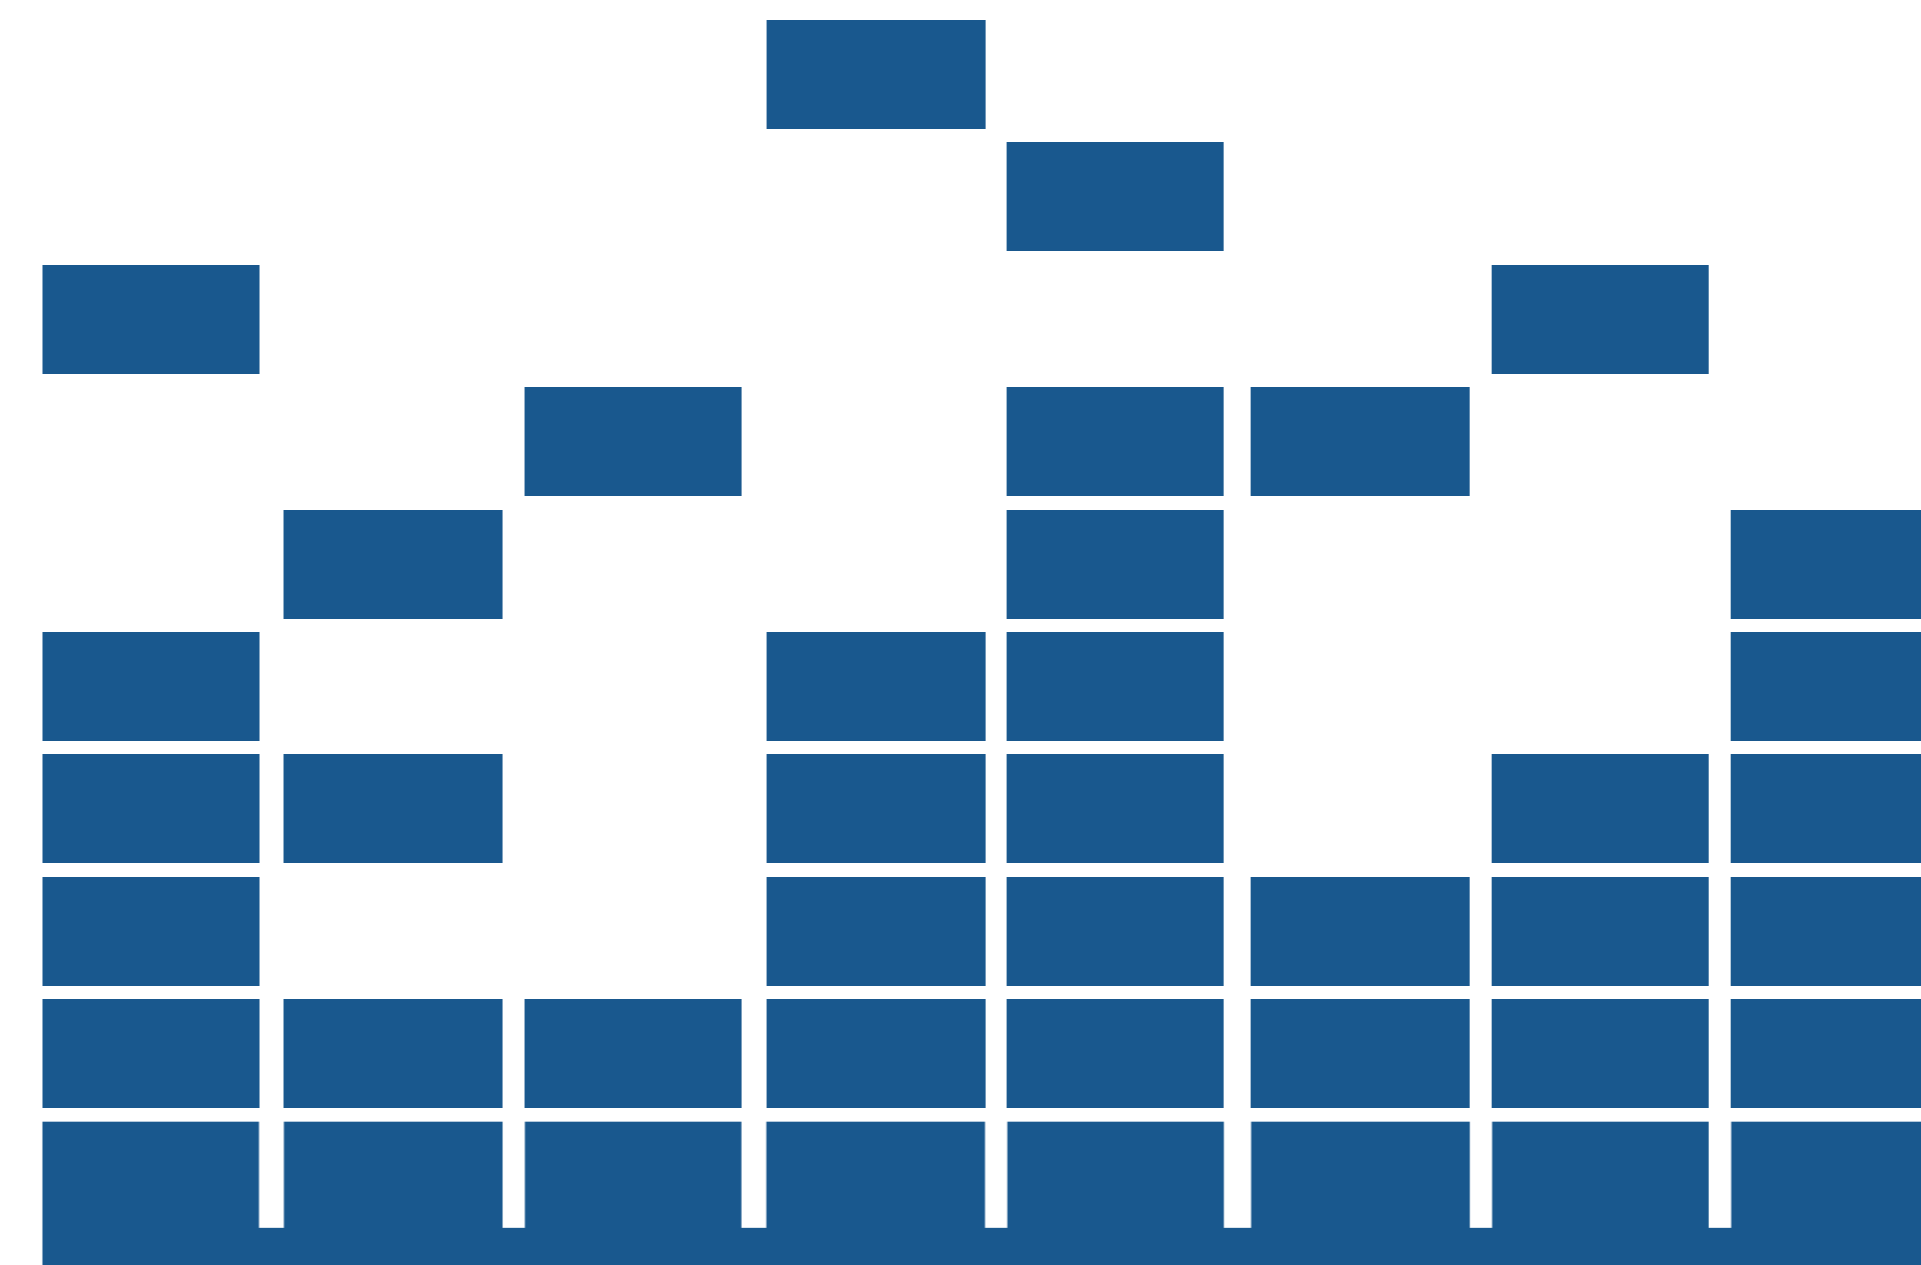

- Balances soil pH for turf & landscapes which increases nutrient availability
- Provides calcium & magnesium
- Fast results & easy application

[www.mineralprocess.com](http://www.mineralprocess.com)

Net Weight 50 LBS (22.6kg)



**EQUALIZE™ GT**

Pelletized Hi-Mag Limestone



Cores:

- 653 C
- 187 C
- Preto

**ATENÇÃO**

Obs.: Por haver diferenças, na calibração dos monitores dos computadores, as cores apresentadas nas artes enviadas para aprovação, podem sofrer distorção.  
As cores serão seguidas pela escala PANTONE UNIVERSAL, seguindo sempre, o código PANTONE, enviado pelo cliente.

Length 23.83" (58 cm)